

ComboCue2

Simple !



Description

When your cueing needs are simple the ComboCue2 is the system to use. The ComboCue2 is a dedicated system for applications that require a reliable cueing system providing only a visual and audio cue. Lightweight construction and internal receiver make this system compact and easy to use.

The soft touch front panel controls allow you to operate the unit in either safe or unsafe modes. In safe mode a single cue of fixed length will be received and displayed. In the unsafe mode the display will show for the duration of time that pressure is applied to the button on the transmitter.

All Interspace systems have been thought out with the live event in mind. The scanning display eliminates the 'did it flash?' problem and the detachable aerial allows for remote reception. A $\frac{1}{4}$ inch stereo jack provides audio output and can drive either headphones or a line input via a 4 level volume control on the front panel. The power supply has an IEC input for fast connection and use worldwide.

Features

- Simple set-up
- Visual and Audible signals
- Soft touch buttons
- Lightweight construction
- Safe/Unsafe mode
- Worldwide power supply

3 year Limited Factory Warranty

Hive Industries

Industries House 3 Austins Mews Hemel Hempstead Hertfordshire HP1 3AF UK

call: +44 (0)1442 264839, Fax: +44 (0)1442 212506

email: sales@hiveindustries.com web: www.hiveindustries.com



Specifications

Signals:

Europe: RF 433Mhz.
 USA & Canada: RF 315Mhz.
 Audio on 600Ohms 1Vp-p Variable

Accessories included

2 Hand transmitters
 1 Aerial
 1 Inline Power supply

Connectors:

1/4" jack out. Balanced audio output.
 BNC for Aerial
 2.1mm DC Input Power Jack

Available Options:

Hand transmitters available in either single cue or next and back {2 button} versions.
 A maximum of 50 transmitters can be programmed to the receiver in any combination.

Required user parts:

1/4" Stereo headphones if tone is required or cable to external device (Audio Desk VTR etc.)

Dimensions and weights mm (inch)


Main unit;
 DxWxH: 120 (5 8/10th") x 180 (7") x 40 (1 1/4")
 Weight: 340g (12oz)

PSU:
 DxWxH: 85 (3 1/4") x 50 (2") x 33 (1 3/10th")
 Weight: 150g (5.3oz)

Transmitters:
 DxWxH: 100 (4") x 65 (2 1/2") x 25 (1")
 Weight: 100g (3.6oz)

Aerial:
 Dia x L: 16 (13/20") x 180 – 433MHZ (8 1/2"– 315Mhz)
 Weight: 28g (1oz)

Power:
 International inline Power Supply 100-240VAC
 1.0A max 47-63Hz. IEC connector

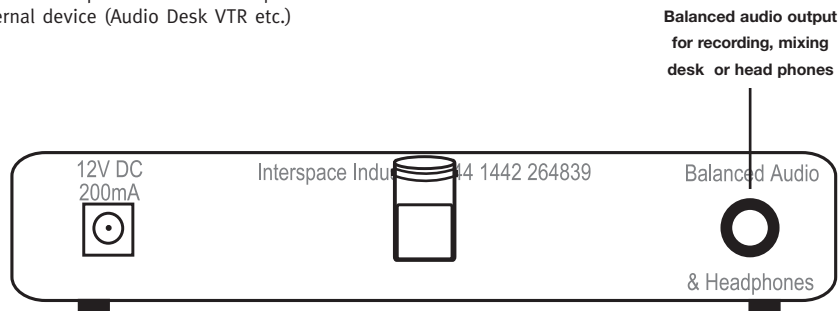

Additional Remote Transmitters Option



All Interspace cueing systems can be programmed by the user to accept signals from up to 50 transmitters. Additional 1 or 2 button remotes are available as an option for the ComboCue.

The unit is powered by a standard 9v battery and on average will last for 100,000 button pushes. The button gives positive tactile feedback to the presenter.